CUSTOMER IS SOLELY RESPONSIBLE FOR MOTOR PERFORMANCE AND SUITABILITY IN APPLICATIONS FOR CUSTOMER'S USES

REV	ECO	REV BY	DATE	APPD	DATE
CB	0027415	F. MORENO	07-13-2012	G. ALVIDREZ	07-13-2012

END PLAY .04[1.0] MAX.

NOTE:
1. IF USED WITH SOLID STATE SPEED CONTROL CONTROL COULD CAUSE NOISE.
2. PROLONGED OPERATION IN SHAFT VERTICAL POSITION COULD RESULT IN FAILURE OF THRUST WASHER.

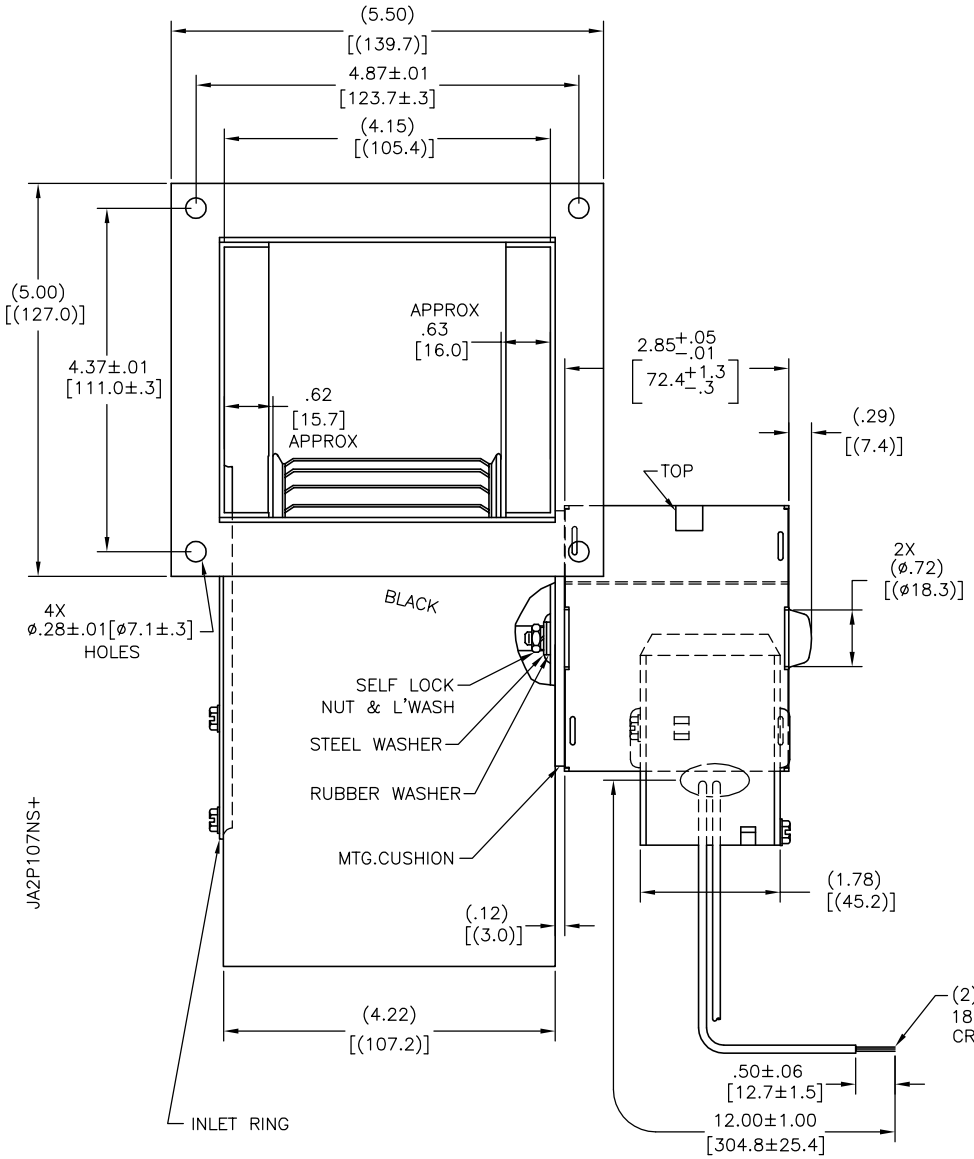

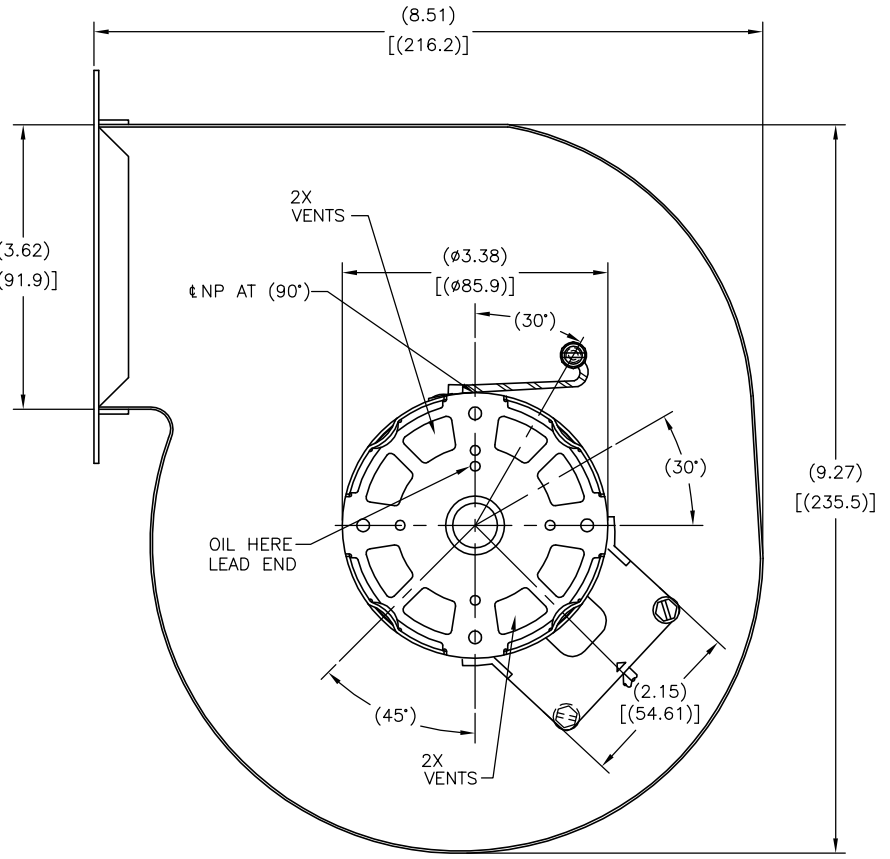

ELECTRICALLY PER SAMPLE S-3596F

AFTERMARKET	CCWLE-CWSE

NAMEPLATE DATA:
Century
Tipp City, OH THERMALLY PROTECTED
SER.DATE, PLT MTR MOD JA2P107NS+ STK. NO. 459A
115V 50/60HZ 2.1/1.9A 1400/1630RPM 1/25HP
CLASS B INS. MAX CONT A.O. 1PH BLOWER MOD. 14
ASSEMBLED IN MEXICO ←ROTATION→

GEOMETRIC CHARACTERISTICS & SYMBOLS
FLATNESS
STRAIGHTNESS
ANGULARITY
PERPENDICULARITY (SQUARENESS)
PARALLELISM
ROUNDNESS (CIRCULARITY)
CYLINDRICITY
PROFILE OF ANY SURFACE
PROFILE OF ANY LINE
RUNOUT
TRUE POSITION
CONCENTRICITY
SYMMETRY
ASME Y14.5M 1994

UNLESS OTHERWISE SPECIFIED
DIM. TOLERANCES ARE AS FOLLOWS:

	X	XX	XXX	XXXX
INCH	±.1	±.02	±.005	±.0005
mm	±0.5	±0.13	±0.013	

ANG. ±.50 DEG
REMOVE BURRS & BREAK SHARP EDGES:
INCH .003-.015 mm 0.1-0.4
CORNER FILLETS TO:
INCH .020 mm 0.5
MACHINE SURFACES:
INCH 125 mm 3.2
METRIC DIMS. SHOWN IN [BRACKETS]

DR BY: DD
APPD:
THIRD ANGLE PROJECTION
EDS DATE 11-11-2011
FORMAT REV H

CONFIDENTIAL: THIS DRAWING AND ITS INFORMATION ARE THE EXCLUSIVE AND CONFIDENTIAL PROPERTY OF REGAL-BELOIT CORPORATION AND ARE NOT TO BE DISCLOSED, DUPLICATED, DISTRIBUTED OR OTHERWISE USED WITHOUT THE WRITTEN CONSENT OF REGAL-BELOIT CORPORATION. -ALL RIGHTS RESERVED.

REGAL **REGAL-BELOIT CORPORATION**

DESCRIPTION
MODEL-SFHP-3.3
OUTLINE

SIZE C
DWG NO JA2P107
SCALE NONE
SHEET 1