


CUSTOMER IS SOLELY RESPONSIBLE FOR MOTOR PERFORMANCE AND SUITABILITY IN APPLICATIONS FOR CUSTOMER'S USES

REV	ECO	REV BY	DATE	APPD	DATE
G	0027407	FANMARRO	07-13-2012	MAMVA	07-13-2012

END PLAY .04[.10] MAX.

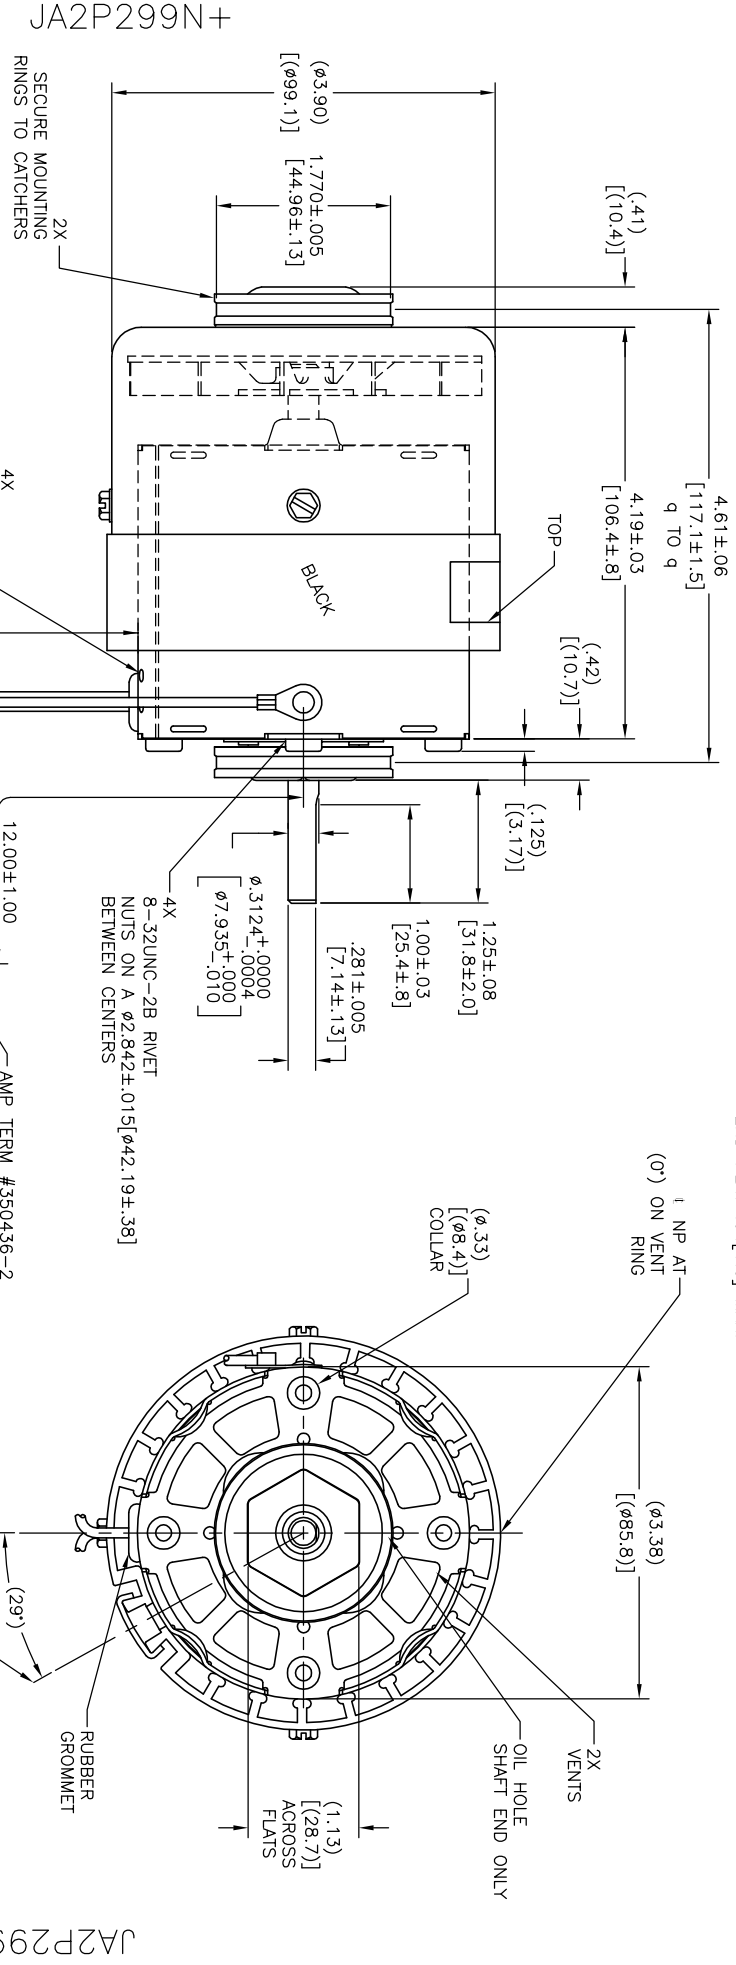

NOTE:  
DISTRIBUTION: CUST. P./N: 9654  
GRAINGER: CUST. P./N: 4VA36

NAMEPLATE DATA:

**Century**  
THERMALLY PROTECTED

SER. DATE, PLT MOD JA2P299N+  
208-230V 60HZ .8A 1550RPM 1/30HP A.O.  
CLASS B. INS. MAX AMB. 40°C  
ASSEMBLED IN MEXICO

GEOMETRIC CHARACTERISTICS & SYMBOLS

- c FLATNESS
- d STRAIGHTNESS
- e PERPENDICULARITY (SQUARENESS)
- f PARALLELISM
- g ROUNDNESS (CIRCULARITY)
- h CYLINDRICITY
- k PROFILE OF ANY SURFACE
- l RUNOUT
- m TRUE POSITION
- n CONCENTRICITY

UNLESS OTHERWISE SPECIFIED DIM. TOLERANCES ARE AS FOLLOWS:

INCH	±.0005
MILL	±.013
ANG.	±.015
REMOVE BURRS & BREAK SHARP EDGES:	
CORNER FILLETS TO:	0.02
CHAMFER TO:	0.5
MACHINE SURFACES:	125
MACHINE SURFACES:	3.2

DR. BY:	TGARET	08-31-2004
APPD:	TG	08-31-2004
EDS DATE:	11-11-2011	
FORMAT REV:	H	

DESCRIPTION:	MODEL-SFHP-3.3 OUTLINE
SIZE:	C
DWG NO:	18875501
SCALE:	NONE
SHEET:	1

4 3 2 1

A B C D

4 3 2 1

A B C D