NOTES:

1. NO STA-LOC REQUIRED ON IMPELLER.
2. DIMENSION IS WITH ENDPLAY PUSHED TOWARD MOTOR FROM INSIDE OF HOUSING SHELL.
3. INSPECTION TEST FIXTURE REQUIRED.
4. PACK 1 PER CONTAINER, 80 MAX. PER PALLET, PACKING ASSY. 87854335, 16 CARTONS PER LAYER, 5 LAYERS PER PALLET, P.S. 88834200 AND P.S. 88834408.
5. CARTON LABELS MUST ALL FACE ONE DIRECTION TOWARD THE OPEN END OF THE PALLET. SEE P.S. 88834408.
6. NO PACKAGING TAPE OVER CARTON LABEL.

| APPLICATION | FURNACE DRAFT INDUCER | B | LA | FR | A | S | C | E | B | A |
|---|---|---|---|---|---|---|---|---|---|---|
| THERMALLY PROTECTED<br>CLASS "B" INSULATION<br>416 S.S. SHAFT | | GS | 21 | 47 | V | 02 | EJ | 5 | 3 | 0 |
| CUSTOMER | FASCO DIST. | | | | | | | | | |
| CUSTOMER PART NO. | A131 | | | | | | | | | |

LEAD MATERIAL
18 GA. 125°C 4/64 INSUL.
EPDM. (2) BLACK
12.00/10.00 IN. LONG
SOCKET TERMS. 89036006
AMP 350537-1

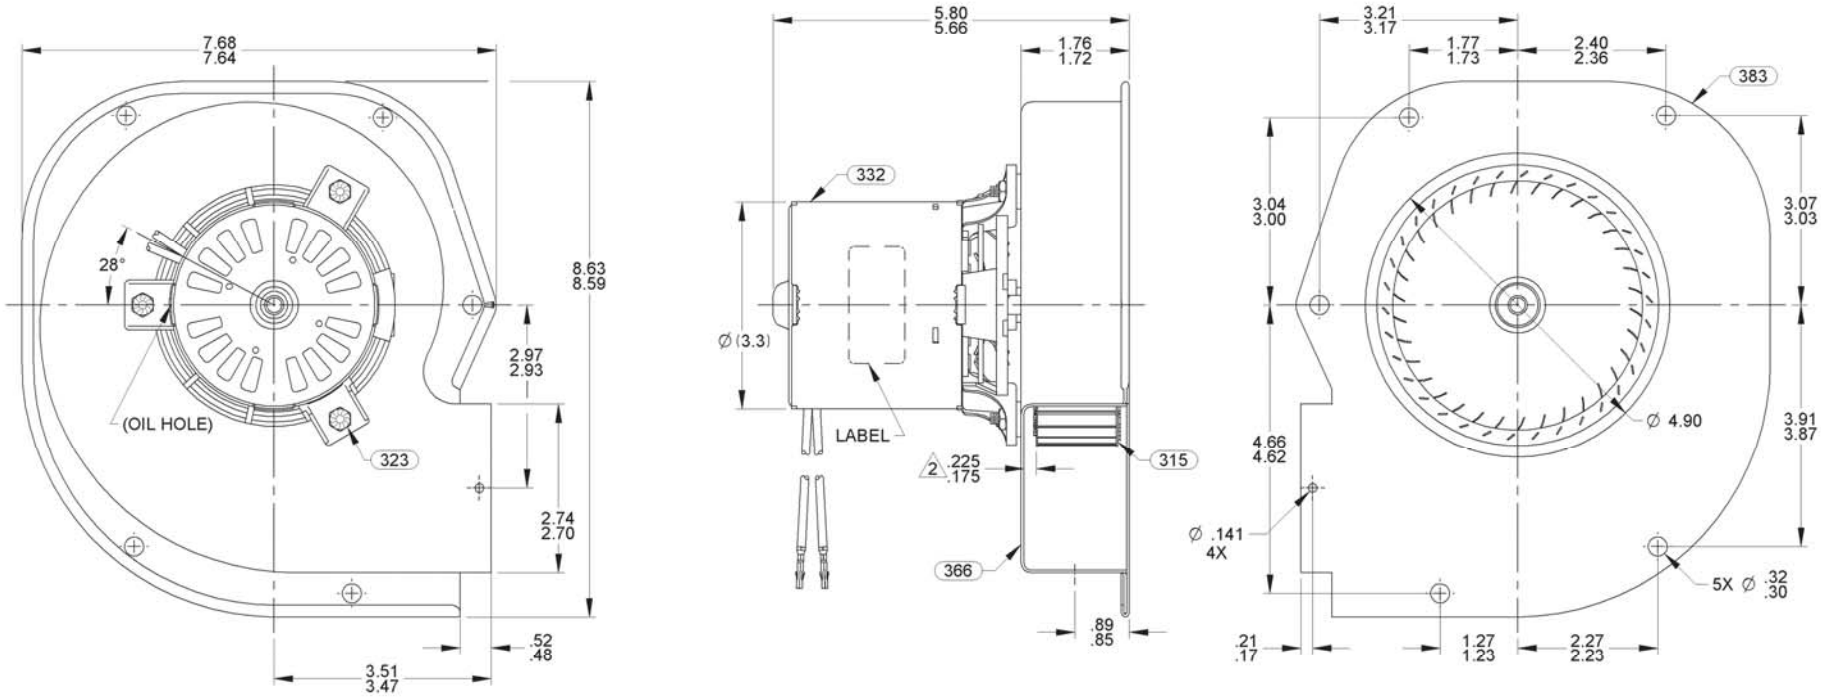


TYPICAL PERFORMANCE TEST DATA WITH 1 5/16 INCH INLET RESTRICTOR

AT 115 VOLTS 60 HZ.

| | R.P.M. | WATTS | AMPS |
|---|---|---|---|
| | 3150 | 66 | .91 |
| BLOWER WEIGHT 4 1/4 LBS. | | | END PLAY .030/.010 |

| ECO. NO. | REV. | DATE | APPROVAL |
|---|---|---|---|
| 4002197 | 08 | 05/31/11 | MLM/PLA |
| 4007810 | 09 | 1/7/2013 | SDM/BGP |

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:
FRACTIONS ± 1/16 DECIMALS .XX ± .01 .XXX ± .005 ANGLES ± 1°

| APPROVALS | DATE |
|---|---|
| DRAWN BGP | 07/01/2005 |
| CHECKED SDM | 07/01/2005 |
| FINISH COLOR BLOWER - NATURAL<br>MOTOR - FLAT BLACK | |

FASCO MOTORS GROUP
AC MOTOR/BLOWER DIVISION

CONFIDENTIAL: DO NOT DUPLICATE OR DISCLOSE TO THIRD PARTIES WITHOUT WRITTEN PERMISSION OF FASCO MOTORS GROUP, AC MOTOR/BLOWER DIVISION.

TITLE: BLOWER ASSEMBLY

SIZE B | DWG. NO. 7021 9406 | REV. 09

DO NOT SCALE DRAWING | SHEET 1 OF 1

If Printed, this is an Uncontrolled Document.