

NOTES:


1. INSPECTION TEST FIXTURING REQUIRED.
2. AFTER TESTING, COIL LEADS INSIDE CONDUIT BOX, AND SECURE COVER WITH PC 324 SCREWS.
3. PACK 1 PER CONTAINER, 100 MAX. PER PALLET, PACKING ASSY. 87854000, 20 CONTAINERS PER LAYER, 5 LAYERS PER PALLET, P.S. 88834200 AND P.S. 88834408.
4. CARTON LABELS MUST ALL FACE ONE DIRECTION TOWARD THE OPEN END OF THE PALLET. SEE P.S. 88834408.
5. NO PACKING TAPE OVER CARTON LABEL.

APPLICATION

THERMALLY PROTECTED

B	LA	FR	A	S	C	E	B	A
17	21	30	F	05	AS	5	3	0
CUSTOMER FASCO DIST.								
CUSTOMER PART NO. B24220								

LEAD MATERIAL
 18 GA. 125°C 2664 INSUL.
 X-LINKED POLY. (2) BLACK
 14.00/12.00 IN. LONG
 .56/.44 IN. STRIP

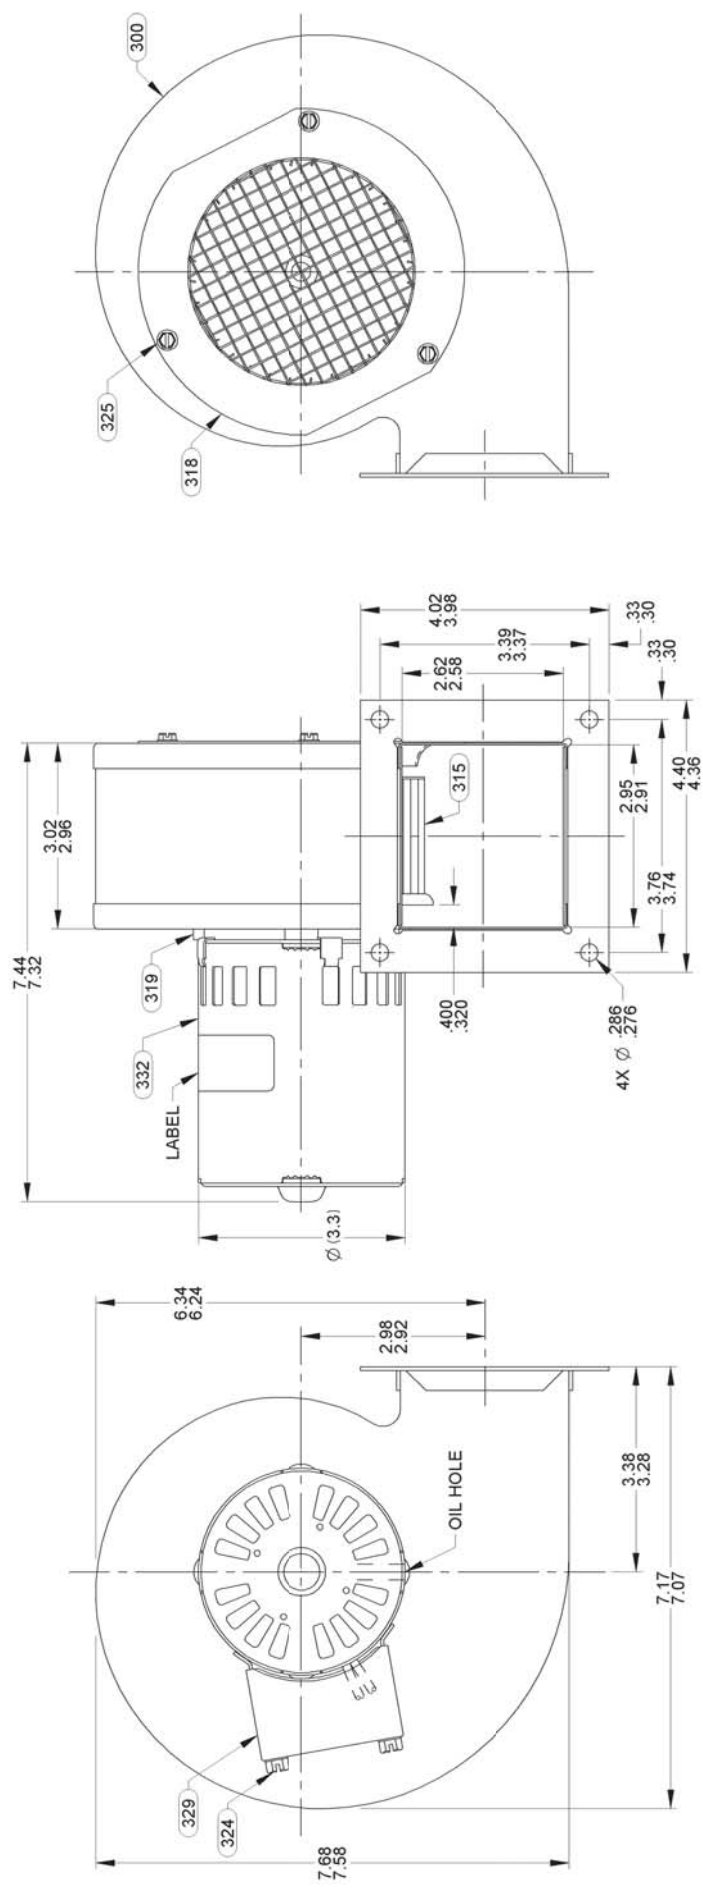

ECO NO.		REV.	DATE	APPROVAL	TYPICAL PERFORMANCE TEST DATA WITH 2.06" INLET RESTRICTOR.		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE FRACTIONS DECIMALS ANGLES ± .1/16 ± .005 ± .1		FASCO FASCO MOTORS GROUP AC MOTORBLOWER DIVISION	
4008553	37	3/11/2013	SDMIKSA		AT 115 VOLTS 60 HZ.	R.P.M.	WATTS	AMPS	APPROVALS	DATE
4008774	38	4/2/2013	SDMIKSA			3293	82	1.09	BGP	10/05/2004
4011129	39	1/3/2014	SDMNJUP						SDM	10/05/2004
					BLOWER WEIGHT			END PLAY	FINISH COLOR	
					5.0 LBS.			.050/.010	BLACK	
										DO NOT SCALE DRAWING
										SHEET 1 OF 1
										REV 39
										DWG NO. 7021 4399
										TITLE BLOWER ASSEMBLY
										CONFIDENTIAL - DO NOT DUPLICATE OR DISCLOSE TO THIRD PARTIES WITHOUT WRITTEN PERMISSION OF FASCO MOTORS GROUP AC MOTORBLOWER DIVISION.