

NOTES:

1. INSPECTION TEST FIXTURING REQUIRED.
2. AFTER TESTING, COIL LEADS INSIDE CONDUIT BOX, AND SECURE COVER WITH PC 324 SCREWS.
3. PACK 1 PER CONTAINER, 100 MAX. PER PALLET, PACKING ASSY. 87854000, 20 CONTAINERS PER LAYER, 5 LAYERS PER PALLET, P.S. 88834200 AND P.S. 88834408.
4. CARTON LABELS MUST ALL FACE ONE DIRECTION TOWARD THE OPEN END OF THE PALLET. SEE P.S. 88834408.
5. NO PACKING TAPE OVER CARTON LABEL.


APPLICATION

THERMALLY PROTECTED

| | | | | | | | | |
|----|----|----|---|----|----|---|---|---|
| B | LA | FR | A | S | C | E | B | A |
| 17 | 21 | 30 | F | 05 | AS | 5 | 3 | 0 |

CUSTOMER: FASCO DIST.
CUSTOMER PART NO. B24220

LEAD MATERIAL
18 GA. 125°C 2/64 INSUL.
X-LINKED POLY. (2) BLACK
14.00/12.00 IN. LONG
.56/.44 IN. STRIP

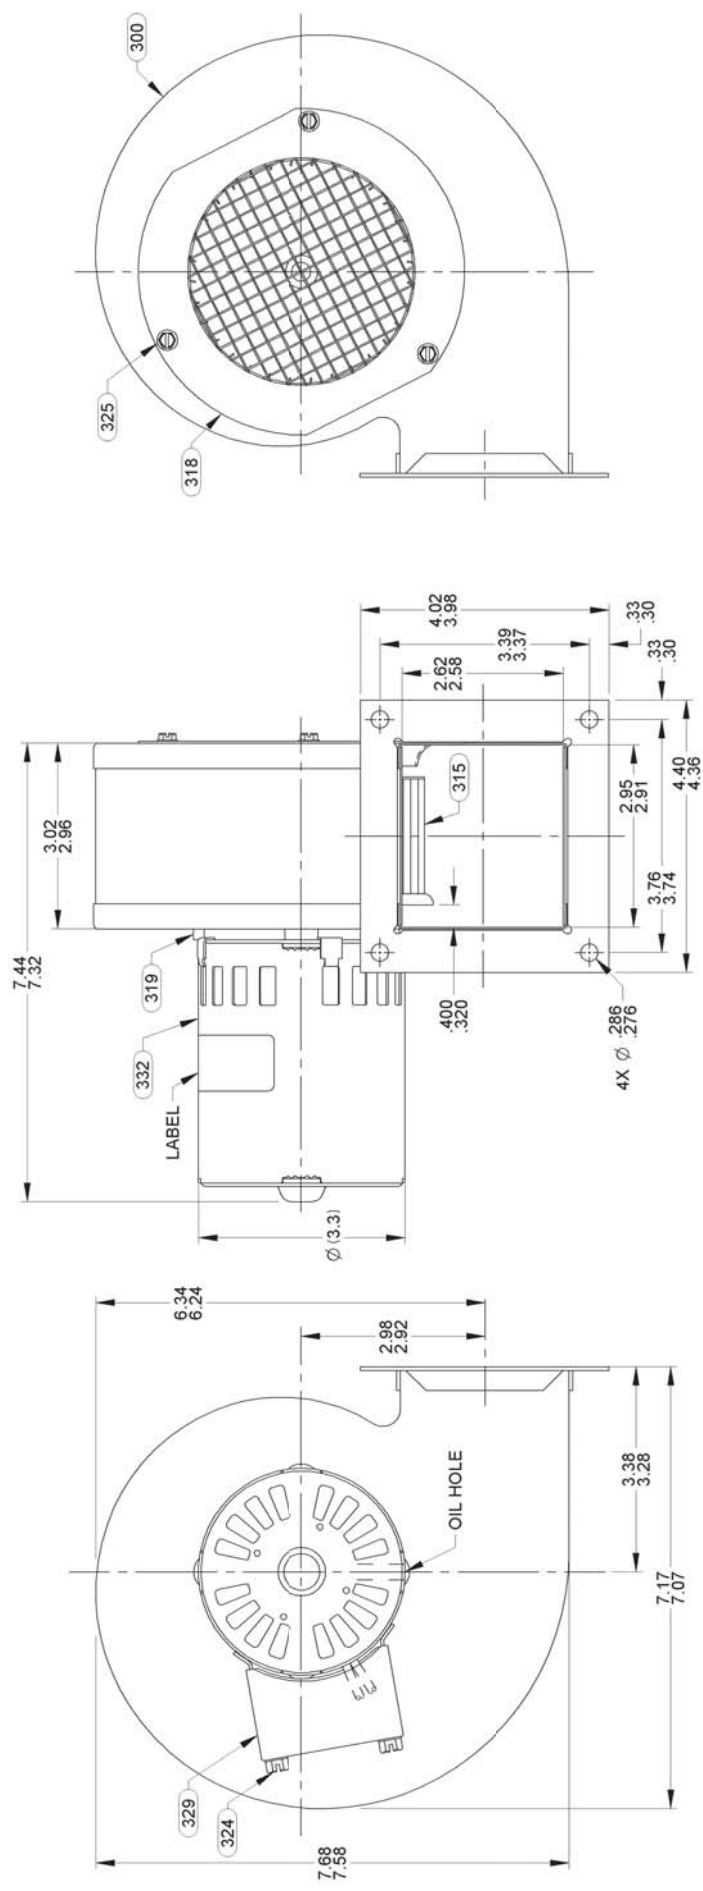

| | | | | | | | | | | | |
|---------|----|-----------|---------|----------|---|-----|-------|---|-----|---|-----------------|
| ECO NO. | | REV. | DATE | APPROVAL | TYPICAL PERFORMANCE TEST DATA WITH 2.06" INLET RESTRICTOR. | | | UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE FRACTIONS DECIMALS ANGLES ± 1/16 ± .005 ± .01 | | FASCO FASCO MOTORS GROUP AC MOTORBLOWER DIVISION | |
| 4008553 | 37 | 3/11/2013 | SDMIKSA | | AT | 115 | VOLTS | 60 | HZ. | AMPS | 10/05/2004 |
| 4008774 | 38 | 4/2/2013 | SDMIKSA | | | | | | | 82 | 10/05/2004 |
| 4011129 | 39 | 1/3/2014 | SDMNJUP | | | | | | | 1.09 | 10/05/2004 |
| | | | | | BLOWER WEIGHT | | | END PLAY | | | FINISH COLOR |
| | | | | | 5.0 | | | .050/.010 | | | BLACK |
| | | | | | | | | | | DO NOT SCALE DRAWING | SHEET 1 OF 1 |
| | | | | | | | | | | REV | 39 |
| | | | | | | | | | | DWG NO. | 7021 4399 |
| | | | | | | | | | | TITLE | BLOWER ASSEMBLY |
| | | | | | | | | | | CONFIDENTIAL - DO NOT DUPLICATE OR DISCLOSE TO THIRD PARTIES WITHOUT WRITTEN PERMISSION OF FASCO MOTORS GROUP AC MOTORBLOWER DIVISION. | |