

APPLICATION

THERMALLY PROTECTED

B	LA	FR	A	S	C	E	B	A
16	21	30	V	02	AF	5	1	0


CUSTOMER FASCO DIST.
CUSTOMER PART NO. B75

GROUND LEAD
18 GA. 125°C 2/64 INSUL.
X-LINKED POLY. GRN/YEL
8.00/6.00 IN. LONG
.56/1.44 IN. STRIP

LEAD MATERIAL
18 GA. 125°C 2/64 INSUL.
X-LINKED POLY. BLK
8.00/6.00 IN. LONG
.56/1.44 IN. STRIP

NOTES:

1. COIL LEADS INSIDE OUTLET BOX AND SECURE COVER WITH PC 324 SCREW AFTER TESTING.
2. NO KNOCKOUTS REMOVED.
3. TRAP INLET SCREEN UNDER INLET RING AND SECURE WITH PC 325 SCREW.
4. SINGLE: PACK 1 PER CONTAINER, 150 MAX. PER PALLET, PACKING ASSY. 87854000, 30 CARTONS PER LAYER, 5 LAYERS PER PALLET, P.S. 88834200 AND P.S. 88834408.
5. BULK: PACK 20 PER CONTAINER, 240 MAX. PER PALLET, PACK ASSY. 87854376 P.S. 88834200 AND P.S. 88834408.
6. CARTON LABELS MUST ALL FACE ONE DIRECTION TOWARD THE OPEN END OF THE PALLET. SEE P.S. 88834408.
7. NO PACKAGING TAPE OVER CARTON LABEL.

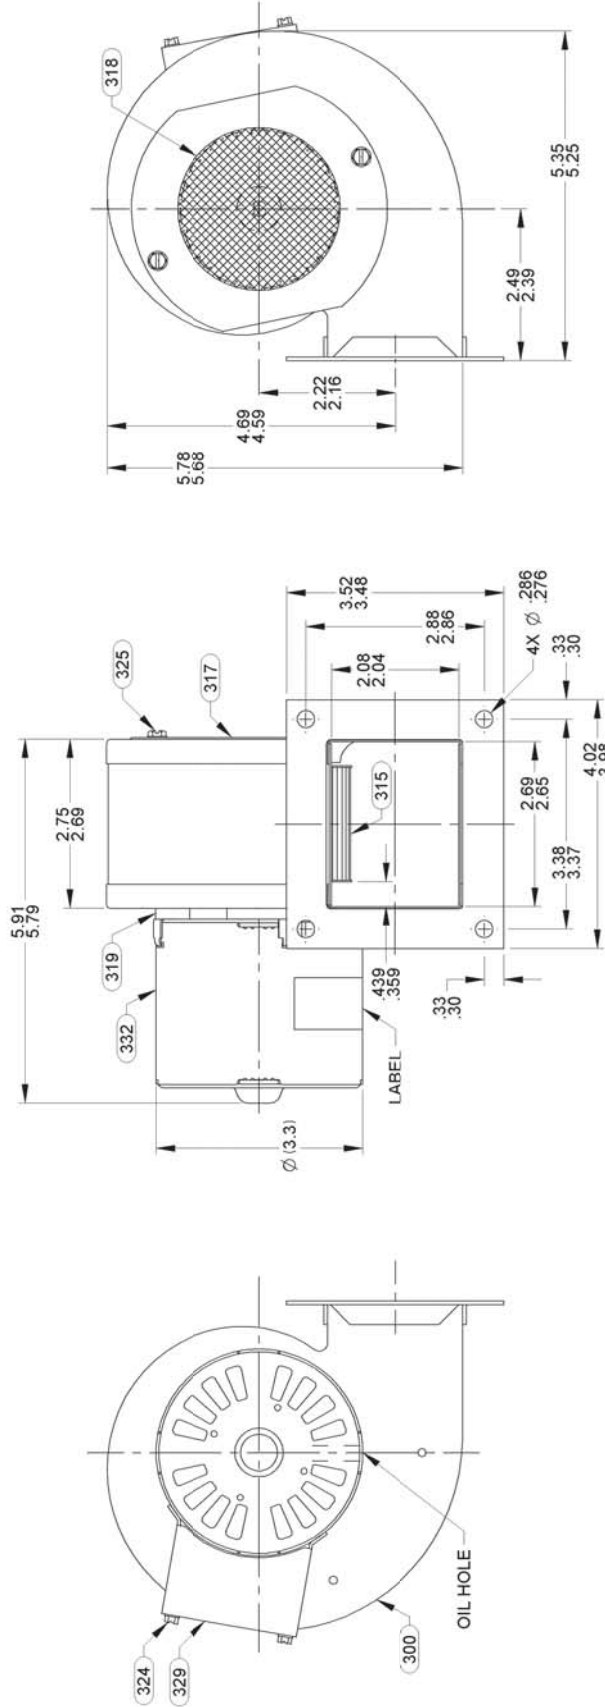

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE FRACTIONS DECIMALS ANGLES ± 1/16 .0010 ± .005 ± 1°

APPROVALS	DATE
JMH	06/25/2003
DRAWN	
CHECKED	06/25/2003
FINISH COLOR	BLACK

TYPICAL PERFORMANCE TEST DATA AT FREE AIR

AT	115	VOLTS	60	HZ.
R.P.M.	3160	WATTS	37	AMPS
END PLAY				.050/.010
BLOWER WEIGHT	3 1/2			LEBS

ECO NO.	REV.	DATE	APPROVAL
4001861	44	04/29/11	MLM/PLA
4003708	45	11/11/11	BGP/SMC
4008426	46	2/26/2013	SDM/BGP
4010880	47	12/9/2013	MLS/SDM

FASCO FASCO MOTORS GROUP
AC MOTOR/BLOWER DIVISION

CONFIDENTIAL - DO NOT DUPLICATE OR DISCLOSE TO THIRD PARTIES WITHOUT WRITTEN PERMISSION OF FASCO MOTORS GROUP AC MOTOR/BLOWER DIVISION.

TITLE: **BLOWER ASSEMBLY**

SIZE: **B** DWG. NO. **7021 2367**

REV. **47**

DO NOT SCALE DRAWING SHEET **1 OF 1**