23	REMOVED BARCODE FROM N/P LABEL.	JMM 11/16/09	24	ADDED BULK PACK OPTION	4000669 SD 1-5-11	25	REVISED CAP. LEAD EXIT LOCATION ON STATOR AND REMOVED CABLE TIES FOR PROTECTOR	4010374 SD 9/23/2013

STANDARD TOLERANCES: ANGULAR +/- 1 DEGREE 2 PLACE DECIMAL +/- .01 3 PLACE DECIMAL +/- .005

If Printed, this is an Uncontrolled Document.

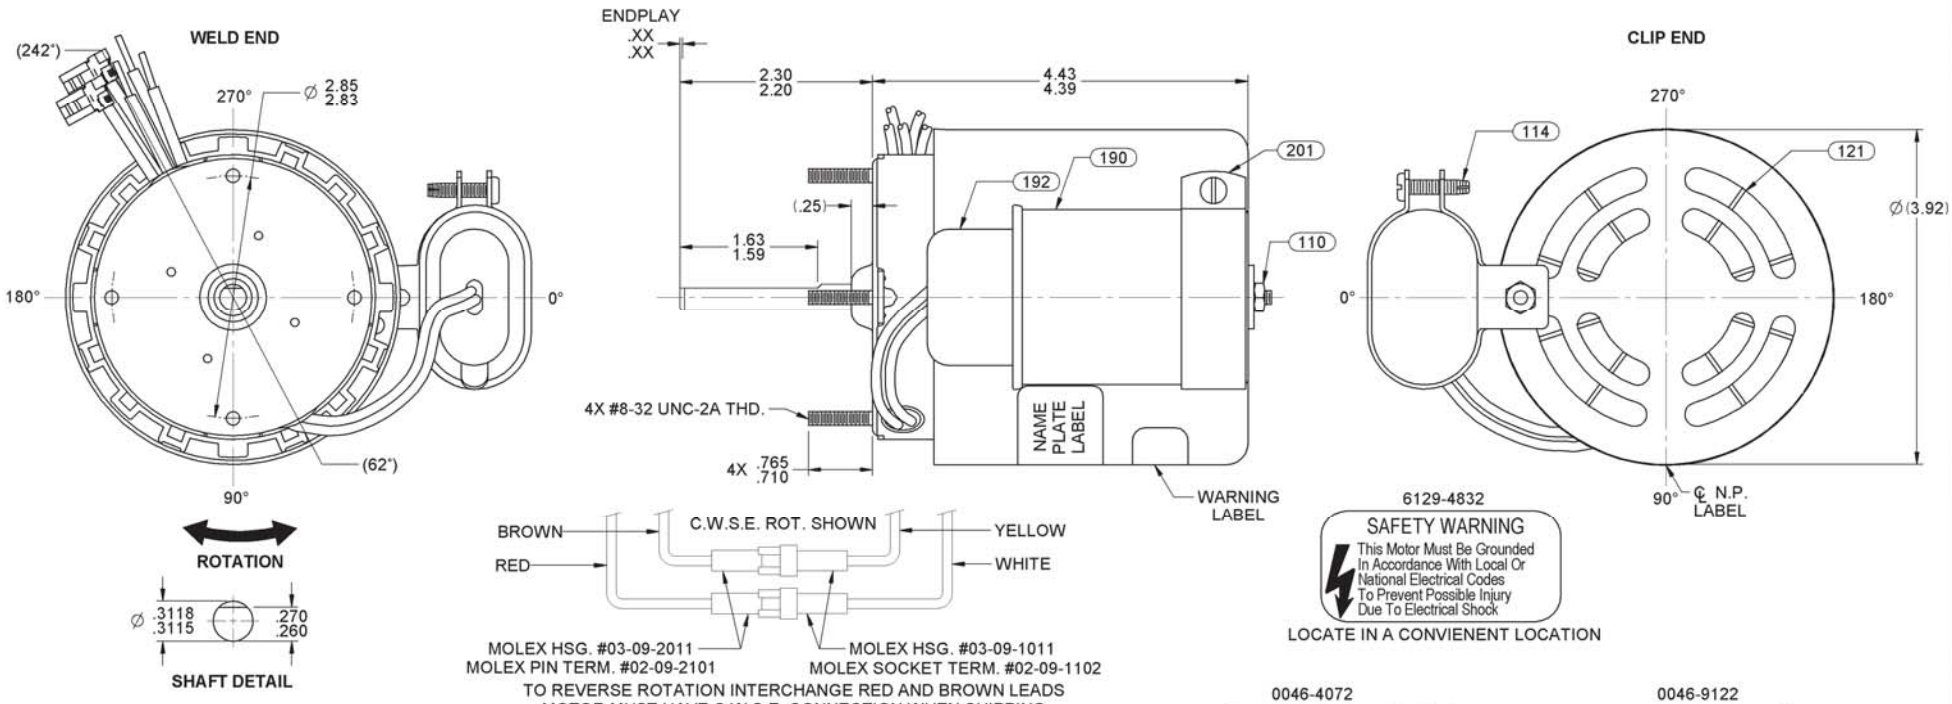

LEAD MATERAIL
18 GA. 125°C 2/64 INSUL.
X-LINKED POLY, (2) BLACK
14.00/12.00 IN LONG
.56/.44 IN STRIP

REVERSING LEADS
18 GA. 125°C 2/64 INSUL.
X-LINKED POLY, RED,
BROWN, YELLOW, WHITE,
4.00/3.00 IN. LONG
W/ TERM HSG.

CAPACITOR LEADS
18 GA. 125°C 2/64 INSUL.
X-LINKED POLY, (2) BLUE,
6.00/4.00 IN. LONG
W/ FFLAG TERMS. 8903-4045
AMP# 42742-2

NOTES:
NO PACKAGING TAPE OVER CARTON LABEL.

FRONT SHAFT POSITION

HORIZONTAL — UP / DOWN

CUSTOMER APPROVAL:

SIGNED:

DATE:

*** TYPICAL PERFORMANCE AT 115 VOLTS 60 Hz.** — **CAP.: 4 MFD 370 VAC**

MOTOR SPEED	IDLE			LOADED				LOCKED			BREAK
	R.P.M.	AMP.	WATT	IN.OZ.	R.P.M.	AMP.	WATT	IN.OZ.	AMP.	WATT	IN.OZ.
C.W.L.E.	3555	.26	30	15.8	3200	.61	70	6.0	1.15	123	17.5
C.C.W.L.E.	3545	.30	32	16.0	3200	.75	79	6.0	1.1	130	17.5

CUSTOMER:	FASCO DIST.
PART NUMBER:	D218
APPLICATION:	PUMP
MOTOR WEIGHT:	4.24 LBS.
ENVIRONMENT:	DRY
FINISH COLOR:	BLACK
DRAWN BY:	SCOTT MOORE
DATE DRAWN:	OCTOBER 01, 2002

FASCO MOTORS GROUP
AC MOTOR/BLOWER DIVISION

CONFIDENTIAL: DO NOT DUPLICATE OR DISCLOSE TO THIRD PARTIES WITHOUT WRITTEN PERMISSION OF FASCO MOTORS GROUP, AC MOTOR/BLOWER DIVISION.

MOTOR TYPE	DRAWING NUMBER
P.S.C.	7162 1073

B	LA	FR	A	S	C	E	B	A	REV.
00	62	28	T	03	AH	5	0	0	25