

CUSTOMER IS SOLELY RESPONSIBLE FOR MOTOR PERFORMANCE AND SUITABILITY IN APPLICATIONS FOR CUSTOMER'S USES

4

3


2

1

REV EDO 0027409 X

REV BY ESINECIO DATE 07-16-2012 APPD MAWILA DATE 07-16-2012

END PLAY .04[1.0] MAX

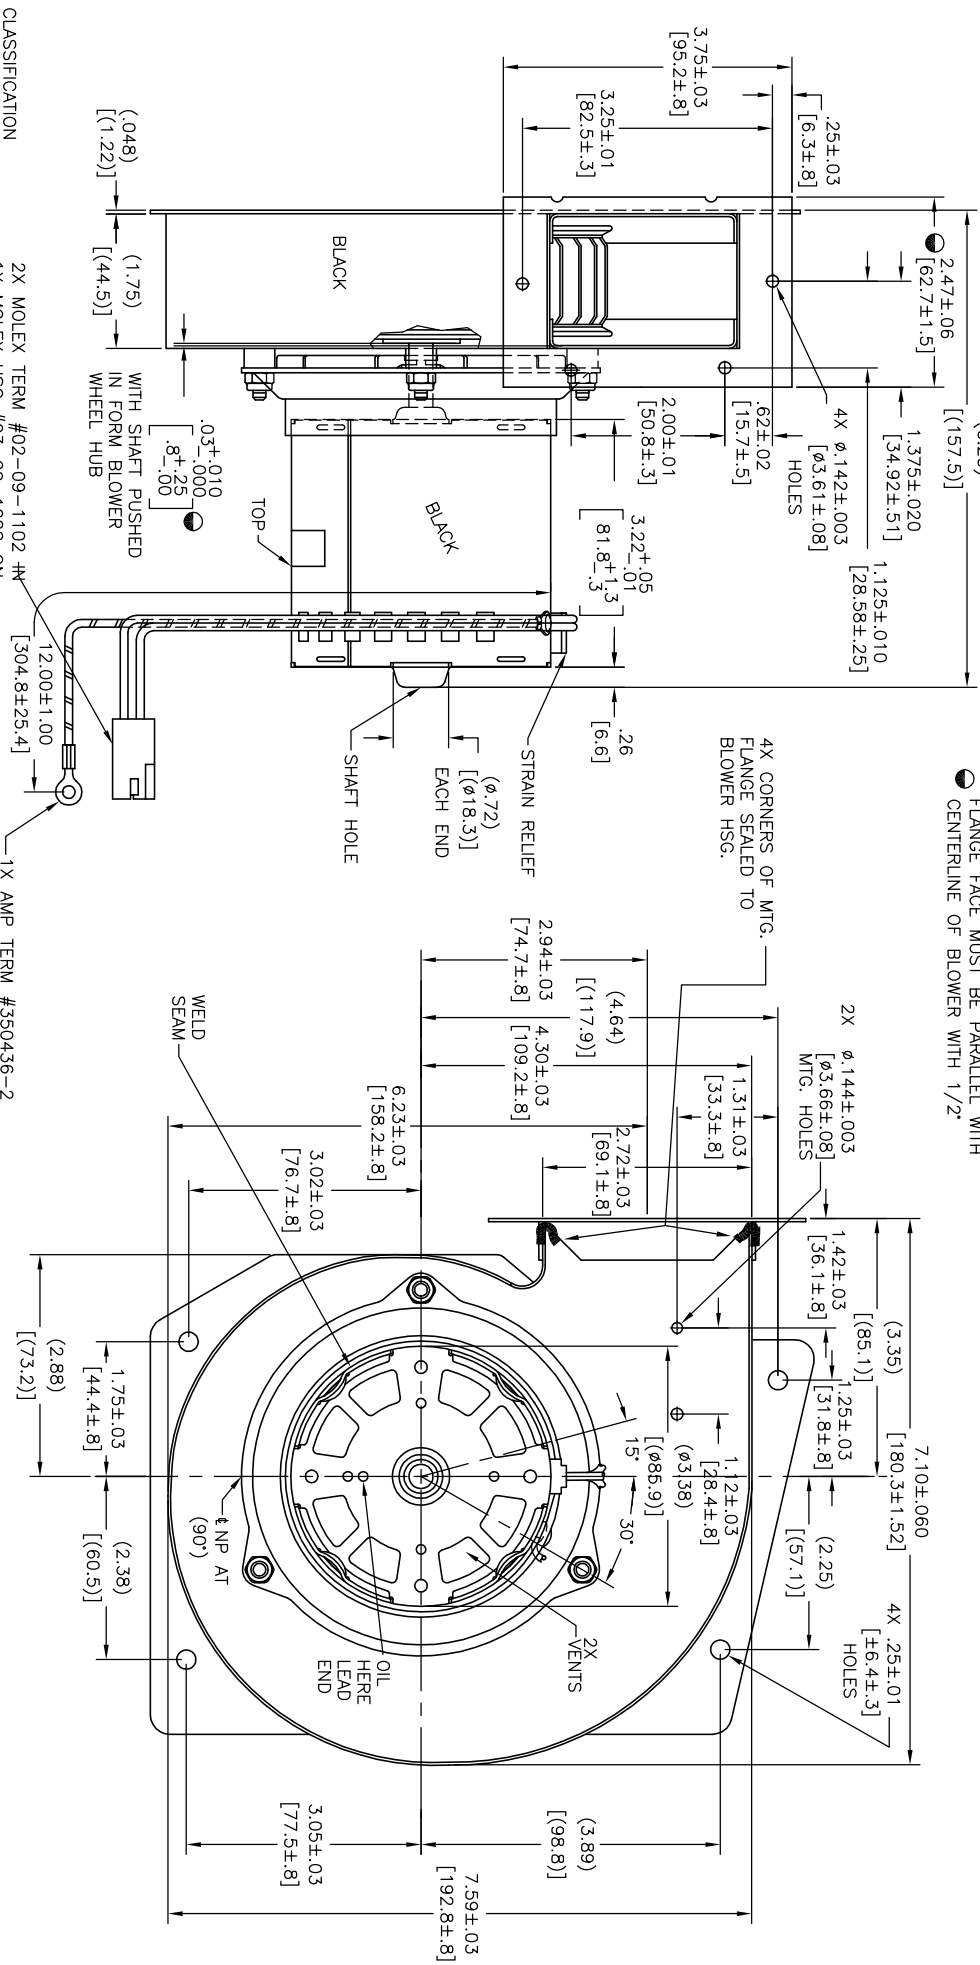


CLASSIFICATION
OF SPECIFICATIONS
= MAJOR

NAMEPLATE DATA:

Tip City, OH
MTR MOD JA1P103NS
SER DATE PLT
115V 60HZ .9A 3300RPM .030HP A.O.
CLASS B INS. MAX. AMB 40°C STOCK NO. 959
ASSEMBLED IN MEXICO

2X MOLEX TERM #02-09-1102 HK
1X MOLEX HSG #03-09-1022 ON
2X 18 GA. .06[1.5] INS. 125°C
EPDM LEADS

1X AMP TERM #350436-2
FOR #10 SCREW ON 18 GA.
03[.81] INS. 125°C. CROSS-LINKED
POLYETHYLENE LEADS



GEOMETRIC CHARACTERISTICS & SYMBOLS

- FINISHES
- SURF FINISHES
- ⊥ PERPENDICULARITY (SQUARENESS)
- ∥ PARALLELISM
- ⊙ ROUNDNESS (CIRCULARITY)
- ⊘ CYLINDRICITY
- △ PROFILE OF ANY SURFACE
- ⊖ RUNOUT
- ⊕ TRUE POSITION
- ⊖ CONCENTRICITY
- ⊖ SYMMETRY

UNLESS OTHERWISE SPECIFIED
DIM. TOLERANCES ARE AS FOLLOWS:

| | | | | |
|-----------------------------------|-------|-------|------|---------|
| INCH | + | XX | ± | XXX |
| MM | + | XX | ± | XXX |
| ANG. | ± | 50 | DEG. | ±0.013 |
| REMOVE BURRS & BREAK SHARP EDGES: | | | | |
| INCH | 0.03 | -0.15 | mm | 0.1-0.4 |
| CORNER FILLETS TO: | | | | |
| INCH | 0.020 | mm | 0.5 | |
| MACHINE SURFACES: | | | | |
| INCH | 125 | mm | 3.2 | |

METRIC DIMS. SHOWN IN [BRACKETS]

DR. BY: JIMMERMAN
APPD: S.WEBER
EDS DATE: 07-08-2005
FORMAT REV: H

REGAL-BELOIT CORPORATION
REGAL
OUTLINE
MODEL-SFHP-3.3
JA1P103

ELECTRICALLY PER SAMPLE S-3941F
NOTE: NAMEPLATE IS TO HAVE A WHITE BACKGROUND WITH BLACK LETTERING.
COWIE-CWSE

A

B

C

D

4

3

2

1

A

B

C

D

SCALE NONE

SHEET 1