CUSTOMER IS SOLELY RESPONSIBLE FORMOTOR PERFORMANCE AND SUITABILITY IN APPLICATIONS FOR CUSTOMER'S USES

END PLAY .04[1.0] MAX.

REV	ECO	REV BY	DATE	APPD	DATE
T	0027409	E.SINECIO	07-16-2012	M.AVILA	07-16-2012

JA1N150NS'

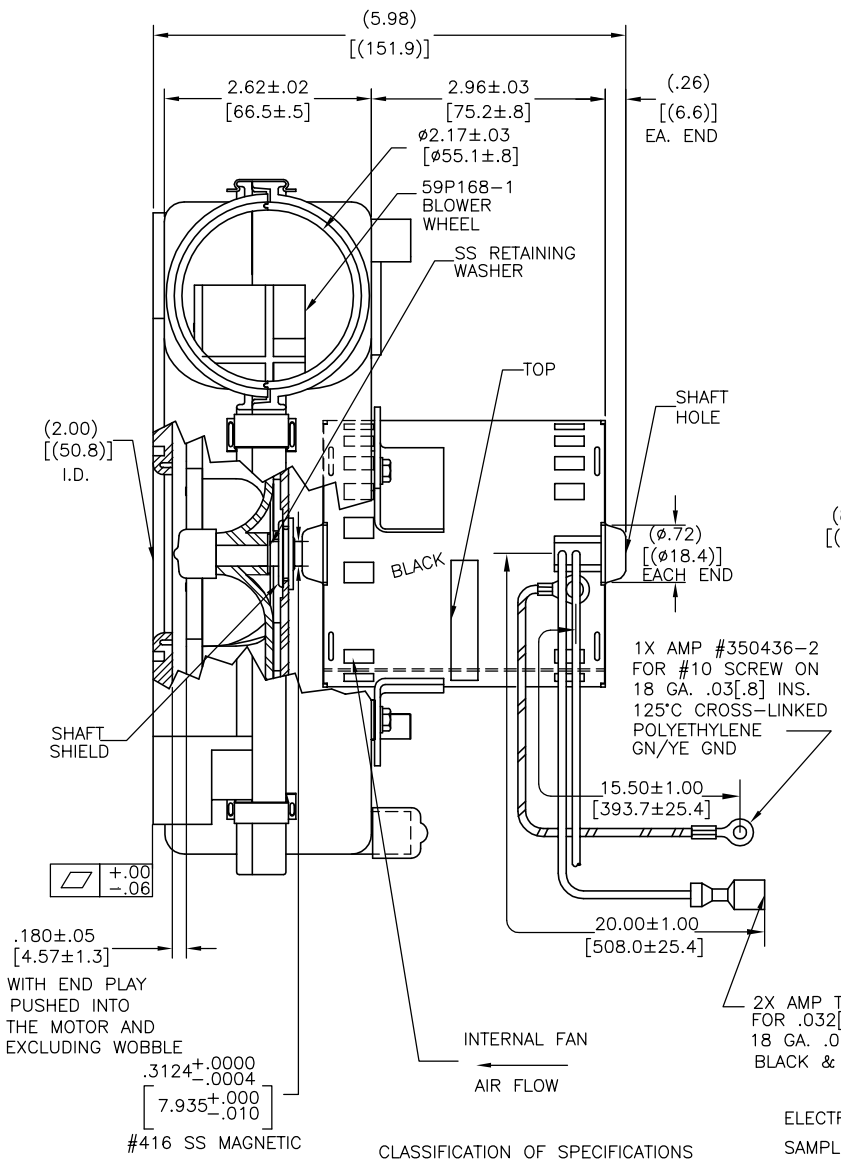

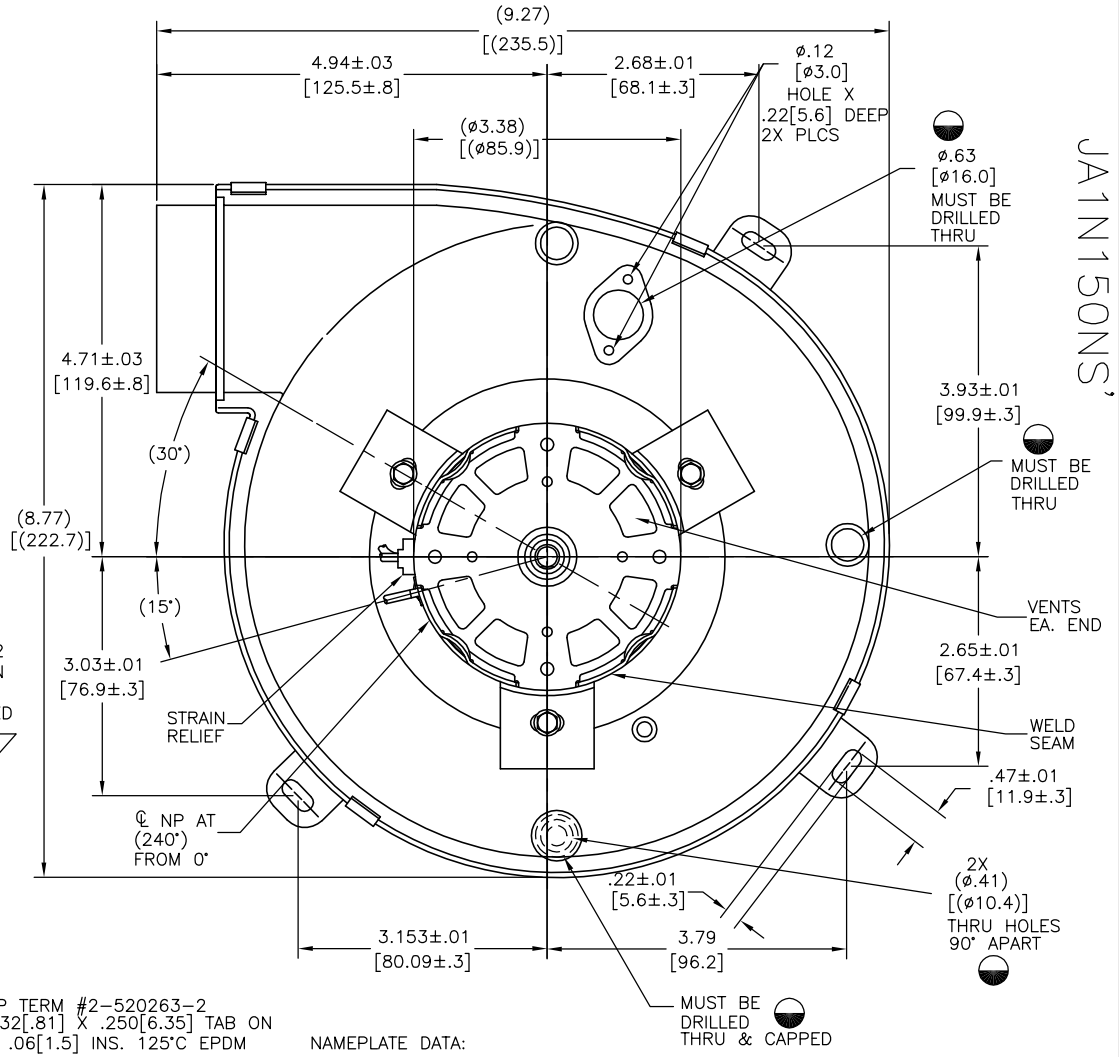

JA1N150NS'

CLASSIFICATION OF SPECIFICATIONS

● = CRITICAL ◒ = MAJOR

ELECTRICALLY PER
SAMPLE S-4017F

CCWLE

NAMEPLATE DATA:

Century

Tipp City, OH

THERMALLY PROTECTED

SER. DATE, PLT MTR MOD JA1N150NS'
115V 60HZ 1.73A 3200RPM .05HP A.O.
CLASS B INS. MAX. AMB. 40°C STOCK NO 9622
ASSEMBLED IN MEXICO

GEOMETRIC CHARACTERISTICS & SYMBOLS
▱ FLATNESS
— STRAIGHTNESS
∠ ANGULARITY
⊥ PERPENDICULARITY (SQUARENESS)
// PARALLELISM
○ ROUNDNESS (CIRCULARITY)
⌭ CYLINDRICITY
⌓ PROFILE OF ANY SURFACE
⌒ PROFILE OF ANY LINE
↗ RUNOUT
⌖ TRUE POSITION
◎ CONCENTRICITY
⌯ SYMMETRY
ASME Y14.5M 1994

UNLESS OTHERWISE SPECIFIED
DIM. TOLERANCES ARE AS FOLLOWS:

	X	XX	XXX	XXXX
INCH	±.1	±.02	±.005	±.0005
mm	±0.5	±0.13	±0.013	

ANG. ±.50 DEG
REMOVE BURRS & BREAK SHARP EDGES:
INCH .003-.015 mm 0.1-0.4
CORNER FILLETS TO:
INCH .020 mm 0.5
MACHINE SURFACES:
INCH 125 mm 3.2
METRIC DIMS. SHOWN IN [BRACKETS]

DR BY: THEROB	02-25-2000	REGAL REGAL-BELOIT CORPORATION
APPD: .	.	DESCRIPTION: OUTLINE MODEL-SFHP-3.3
THIRD ANGLE PROJECTION	EDS DATE 02-22-2008	SIZE C / DWG NO JA1N150
	FORMAT REV H	SCALE NONE / SHEET 1

CONFIDENTIAL: THIS DRAWING AND ITS INFORMATION ARE THE EXCLUSIVE AND CONFIDENTIAL PROPERTY OF REGAL-BELOIT CORPORATION AND ARE NOT TO BE DISCLOSED, DUPLICATED, DISTRIBUTED OR OTHERWISE USED WITHOUT THE WRITTEN CONSENT OF REGAL-BELOIT CORPORATION. -ALL RIGHTS RESERVED.