


07	REVISED TO NEW N/P FORMAT	11/09/2007	08	REMOVE BARCODE UPDATE N/P & UPDATE TO CURRENT STANDARDS	KSA 11/12/09	09	ADDED CARTON LABEL NOTES	4002305 MLM 6/9/11	STANDARD TOLERANCES: ANGULAR +/-1 DEGREE 2 PLACE DECIMAL +/- .01 3 PLACE DECIMAL +/- .005
----	---------------------------	------------	----	---	--------------	----	--------------------------	-----------------------	--

FRONT END

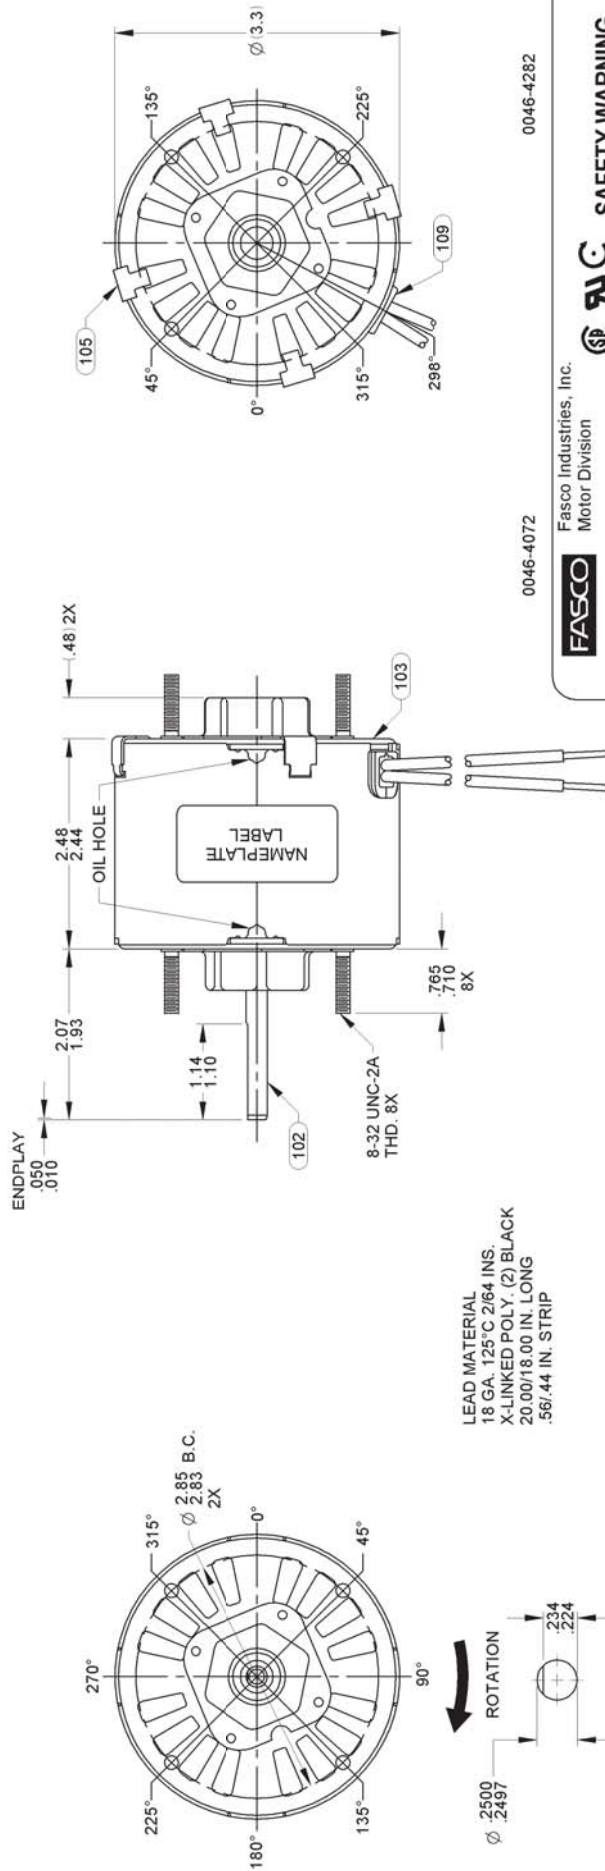

LEAD MATERIAL  
18 GA. 125°C 2/64 INS.  
X-LINKED POLY. (2) BLACK  
20.00/18.00 IN. LONG  
.56/.44 IN. STRIP

**0046-4072** **0046-4282**

**FASCO** Motor Division

**SAFETY WARNING**

This Motor Must Be Grounded According With Local Or National Electrical Codes To Prevent Possible Injury Due To Electrical Shock

**Assembled In Mexico** T.P. AO Class B Max Amb: 40°C

No. 71219952 TYPE U218 60 Hz 1/50 HP  
115 V 3000 RPM  
92 A Model D228 LR36496

61299553

NOTES:  
1. NO PACKAGING TAPE OVER CARTON LABEL.

FRONT SHAFT POSITION	TYPICAL PERFORMANCE AT 115 VOLTS 60 HZ										
	MOTOR SPEED		IDLE		LOADED		LOCKED		BREAK		
	R.P.M.	AMP.	WATT	IN.OZ.	R.P.M.	AMP.	WATT	IN.OZ.	AMP.	WATT	IN.OZ.
HORIZONTAL	3405	.86	56	6.3	3000	.92	72	2.71	1.20	95	7.7
CUSTOMER APPROVAL:											
SIGNED:											
DATE:											

CUSTOMER:	FASCO DIST.	FASCO MOTORS GROUP AC MOTOR/BLOWER DIVISION
PART NUMBER:	D228	
APPLICATION:	OVER COUNTER SALES	
MOTOR WEIGHT:	1 3/4 LB	DRAWING NUMBER
ENVIRONMENT:	DRY	7121 9952
FINISH COLOR:	BLACK	SHADED POLE
DRAWN BY:	SDM	LA FR A S C E B A
DATE DRAWN:	09/27/2005	B 00 21 30 V 01 DX 5 1 0
		REV. 09